



Analytical Instruments
Raised To Excellence


LABSOLUTIONS

OHS Series Overhead Stirrers


Safer, Smarter, Stronger.



PREMIUM RESISTANCE IP 54

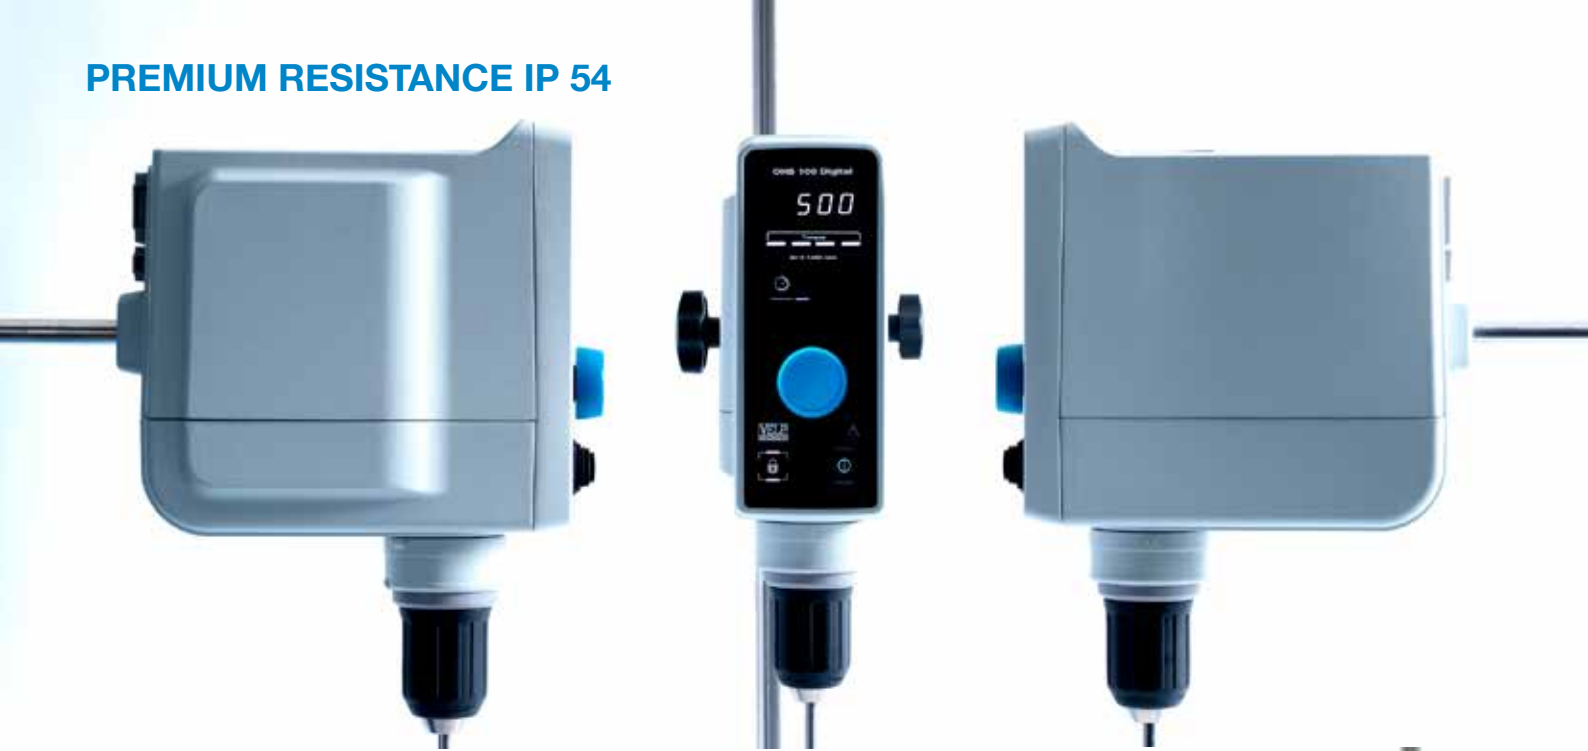

STABLE TORQUE AT ANY SPEED

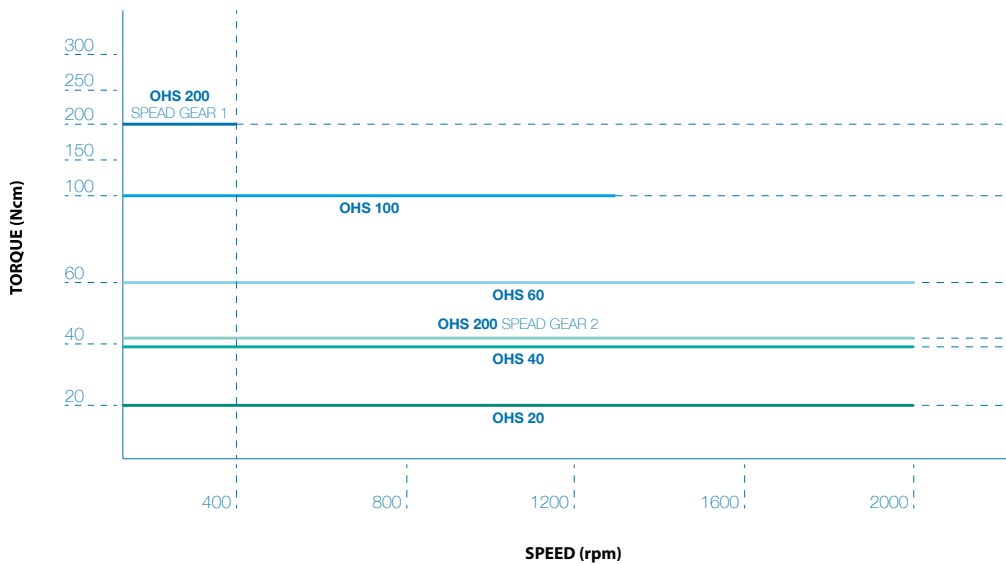

SMART CHUCK™



COMPACT, INTUITIVE AND EASY TO USE



OHS ADVANCE

Overhead stirrers with 3.5" TFT display, method setting, precise torque measurement, temperature monitoring, vibration sensor, timer and Wi-Fi connection to address the most demanding applications.

SAFETY

- The sealed case protects the instruments from corrosion even in the most aggressive environments with an IP 54 protection rating
- The Lock Key prevents unintentional modifications of the work setting
- Full protection in case of overload, overtemperature and overcurrent
- The vibration sensor guarantees maximum safety

PERFORMANCE

- Brushless motor and SpeedServo™ technology maintain torque constant at any speed
- Single and double speed gear models
- Up to 200 Ncm torque and 100 L volume depending on the model
- Silent operation even at maximum speed (up to 2000 rpm)

SIMPLYING YOUR WORK

- The OHS SmartChuck™ technology simplifies the shaft accommodation process that can be carried out even with one hand and does not require any tool, making your life easier.
- All the important information are always at a glance and the knob and keys facilitate the use in any condition
- Temperature monitoring with included Pt 100 temperature probe

EXCLUSIVE TECHNOLOGY

- Real time torque, speed and temperature graph monitoring
- Integral timer
- Programmable methods
- Remote control via Wi Fi connection to VELP Ermes Cloud Platform



ermes enabled



CONFIGURATIONS



OHS 60 Advance
Pt 100 included

OHS 100 Advance
Pt 100 included

OHS 200 Advance
Pt 100 included

OHS DIGITAL

Digital Overhead Stirrers with up to 200 Ncm torque to guarantee excellent performance for any task. All models features brushless motor, SmartChuck™ and full set of safety features.

SAFETY

- The sealed case protects the instruments from corrosion even in the most aggressive environments with an IP 54 protection rating
- The Lock Key prevents unintentional modifications of the work setting
- Full protection in case of overload, overtemperature and overcurrent

PERFORMANCE

- Brushless motor and SpeedServo™ technology maintain torque constant at any speed
- Single and double speed gear models
- Up to 200 Ncm torque and 100 volume depending on the model
- Silent operation even at maximum speed (up to 2000 rpm)

EASE OF USE

- The OHS SmartChuck™ technology simplifies the shaft accommodation process that can be carried out even with one hand and does not require any tool, making your life easier
- Digital display for precise setting and monitoring
- Compact design and easy handling

PREMIUM FEATURES

- Integral Timer for unattended operations
- Real time torque tendency led indicator
- USB Interface



CONFIGURATIONS



OPTIONAL ACCESSORIES

Double clamp	A00001301
Ribbon clamp	A00001302
Probe extension cable, lenght 1 m	A00000002
Glass temperature probe	A00000003
Support rod for probe	A00000372

STAND



A00001300
Support rod and base

STIRRING SHAFTS

With floating blades




Code **A00001304**

With 6-hole paddle



Code **A00001308**

With folding blade




Code **A00001305**

With turbine



Code **A00001309**

With fixed blade



Code **A00001306**

With turbo propeller




Code **A00001310**

With propeller



Code **A00001307**

With anchor



Code **A00001311**

INSTRUMENT - CODE

OHS 20 Digital	230 V / 50-60 Hz	F20100494
OHS 20 Digital	115 V / 60 Hz	F20110494
OHS 40 Digital	230 V / 50-60 Hz	F20100493
OHS 40 Digital	115 V / 60 Hz	F20110493
OHS 60 Digital	230 V / 50-60 Hz	F20100492
OHS 60 Digital	115 V / 60 Hz	F20110492
OHS 100 Digital	230 V / 50-60 Hz	F20100491
OHS 100 Digital	115 V / 60 Hz	F20110491
OHS 200 Digital	230 V / 50-60 Hz	F20100490
OHS 200 Digital	115 V / 60 Hz	F20110490
OHS 60 Advance	230 V / 50-60 Hz	F20100482
OHS 60 Advance	115 V / 60 Hz	F20110482
OHS 100 Advance	230 V / 50-60 Hz	F20100481
OHS 100 Advance	115 V / 60 Hz	F20110481
OHS 200 Advance	230 V / 50-60 Hz	F20100480
OHS 200 Advance	115 V / 60 Hz	F20110480



TECHNICAL DATA

	OHS 20 Digital	OHS 40 Digital	OHS 60 Digital	OHS 100 Digital	OHS 200 Digital	OHS 60 Advance	OHS 100 Advance	OHS 200 Advance
DISPLAY	LED	LED	LED	LED	LED	Graphic TFT	Graphic TFT	Graphic TFT
DISPLAY SIZE	7 Digits	7 Digits	7 Digits	7 Digits	7 Digits	3.5"	3.5"	3.5"
USER INTERFACE	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital
MOTOR	Brushless DC	Brushless DC	Brushless DC	Brushless DC	Brushless DC	Brushless DC	Brushless DC	Brushless DC
STIRRING VOLUME (H2O)	Up to 25 L	Up to 25 L	Up to 40 L	Up to 100 L	Up to 100 L	Up to 40 L	Up to 100 L	Up to 100 L
SPEED GEARS	1	1	1	1	2	1	1	2
MAX TORQUE (Ncm)	20	40	60	100	200	60	100	200
STIRRING SPEED RANGE	30-2000 rpm	30-2000 rpm	30-2000 rpm	30-1300 rpm	6-400 rpm 30-2000 rpm	30-2000 rpm	30-1300 rpm	6-400 rpm 30-2000 rpm
SPEED ACCURACY	1 rpm	1 rpm	1 rpm	1 rpm	1 rpm	1 rpm	1 rpm	1 rpm
SPEED CONTROL	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital
MAX VISCOSITY (mPa*s)	10.000	25.000	50.000	70.000	100.000	50.000	70.000	100.000
TORQUE COMPENSATION	SpeedServo™	SpeedServo™	SpeedServo™	SpeedServo™	SpeedServo™	SpeedServo™	SpeedServo™	SpeedServo™
CHUCK RANGE Ø	Up to 10 mm	Up to 10 mm	Up to 10 mm	Up to 10 mm	Up to 10 mm	Up to 10 mm	Up to 10 mm	Up to 10 mm
SAFETY VIBRATOR SENSOR	-	-	-	-	-	Yes	Yes	Yes
TIMER	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
METHODS	-	-	-	-	-	Yes	Yes	Yes
EXTERNAL PROBE CONNECTION	-	-	-	-	-	Pt 100	Pt 100	Pt 100
TEMPERATURE MEASURING RANGE	-	-	-	-	-	-10 to 350 °C	-10 to 350 °C	-10 to 350 °C
TEMPERATURE RESOLUTION	-	-	-	-	-	0.1 °C	0.1 °C	0.1 °C
INTERFACES	USB	USB	USB	USB	USB	USB / WiFi	USB / WiFi	USB / WiFi
DIMENSIONS (WxHxD)	90x285x235	90x285x235	90x285x235	90x285x235	90x315x235	90x285x235	90x285x235	90x315x235
WEIGHT (Kg)	4,1	4,1	4,1	4,1	4,6	4,1	4,1	4,6
PROTECTION CLASS DIN EN 60529	IP 54	IP 54	IP 54	IP 54	IP 54	IP 54	IP 54	IP 54



SERVICE & SUPPORT

VELP Scientifica products are designed by our engineers to resist years of laboratory use.

Our products are manufactured with premium materials to guarantee the best performance with maximum safety.

According to our experience, a proper and regular maintenance is necessary to ensure the highest performance of analytical instrument. VELP Service Department and VELP Official Partners are always ready to offer you maintenance and service support tailored to your needs.

GET THE SUPPORT YOU NEED CHOOSING THE OPTIONS:

- Help-desk and Remote support
- Technical Assistance
- Analytical Support



We reserve the right to make technical alterations.
We do not assume liability for errors in printing, typing or transmission

VELP Official Partner

DESIGNED AND MANUFACTURED IN ITALY



ITALY – HQ
Via Stazione 16
20865 Usmate (MB) Italy
Tel. +39 039 628811
velpitalia@velp.com

INDIA
velpindia@velp.com

USA
155 Keyland Court, Bohemia
NY 11716 - U.S.
Tel. +1 631 573 6002
velpusa@velp.com

CHINA
velpchina@velp.com