



Hotplate

digital, up to 350°C, large ceramic-coated aluminium surface 310x620 mm

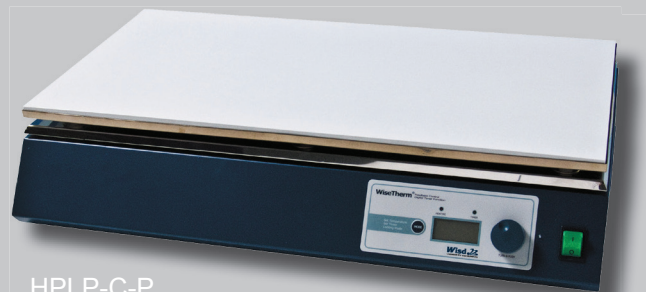

HPLP-C-P



HPLP-C-R

HPLP large-type, digital, 350°C

Ideal for:

- sample drying and general lab heating applications where a large surface is needed

Features:

- up to 350°C
- ceramic-coated aluminium plate 310x620 mm
- heat-, chemical- and restricted acid-resistant
- aluminium body
- CE certified and unique serial number for tracing

Safety mechanism:

- timer 99h 59min with timer-end signal
- error status
- locking mode
- operation LEDs

Controller:

- HPLP-C-P: **Jog-Shuttle** controller with touch-button
- HPLP-C-R: **Remote controller** with touch-button

Model	HPLP-C-P	HPLP-C-R
Body	aluminium	
Plate	ceramic-coated aluminium 310x620 mm	
Temperature range & accuracy	max. 350°C, ±0.3°C	
Temperature resolution	0.1°C display, 0.5°C control	
Temperature uniformity	specially designed heating module: temperature difference less than 10%	
Heating power / consumption	2kW	
Timer & alarm	99hr 59min (with continuous run), error status and timer-end	
Display	digital LCD with backlight function	
Controller	built-in digital PID controller	digital remote controller
Safety circuit	overheat protection	
Permissible temperature & RH %	ambient temperature +5 ~ 50°C, 85% RH	
Dimension & weight	630x360xh150 mm, 16 kg	
Packaging size	750x430xh220 mm, 18 kg	
Power supply	1 Phase AC 120V, 60 Hz or AC 230V, 50/60 Hz	
Order number 230V	DH.WHP03024	DH.WHP03025
Order number 120V	DH.WHP02024	DH.WHP02025